

S55  
5.5" Super Lightweight  
Field Monitor  
Stabilizer Gimbal Best Partner



1280x720  
HD Panel

4K HDMI  
IN & Out

DC Output  
Power for  
Camera

F970/LP-E6  
Dual-purpose  
Battery Plate



175g  
Lightweight  
Design



5.5" Monitor with Widescreen

The high resolution 5.5" LCD display shows bright, clear images - making it an ideal monitor for the discerning DSLR user.




4K HDMI Input & Loop Output

4K HDMI Format Supports

4096X2160p 24Hz / 3840X2160p (30/29.97/25/24/23.98Hz)

Flexible Built-in Dual-purpose Battery Plate

Compatibility with Sony F970 and Canon LP-E6 of lithium batteries for one battery plate. Providing long-time working condition for cameraman in shooting applications.

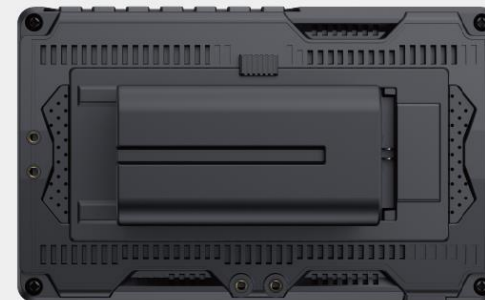

Sony F Series Battery



Canon LP-E6 Battery

Specification

Description	5.5" 4K HDMI On-camera Monitor for Stabilizer Gimbal
Model	S55
Screen size	5.5" IPS
Display Colors	16.7M (8 bit)
Color Gamut	70% NTSC
Resolution	1280 x 720 pixels
Dot pitch	0.0945(H) x 0.0315(W) mm
Aspect Ratio	16:9
Brightness	500cd/m2
Contrast	1000:1
Backlight	LED
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Input	HDMI
Output	HDMI, DC OUT 8.4V, Barrel (5.5mm outer, 2.1mm inner; Power DSLR or mirrorless camera)
Response Time	35 (Max.)(Tr+Td) ms
Audio	Stereo Headphone
HDMI Support Format	480i/576i/480p/576p
	1080i (60/59.94/50)
	720p (60/59.94/50/30/29/25/24/23.98)
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF) 4K UHD 3840 × 2160p (30/29.97/25/24/23.98Hz), 4096 × 2160p (24Hz)
Power Consumption	≤8W
Input Voltage	DC7 ~24V
Power Connector	DC
Battery Plate	F970/ LP-E6 Dual-purpose Battery Plate
Operating Temperature	-20°C ~ 55°C
Storage Temperature	-30°C ~ 65°C
Install Way	¼-20 thread points (bottom, right)
Unit Size	142Lx87.2Hx27.5D (mm)
Unit Weight	175g
Standard Accessory	Micro HDMI Cable, Tilt Cable, Sunshade, Manual

Right Tools for The Right Shot

